

CEMENT-BASED POWDER GLUE

DESCRIPTION

TILEFIX is a powder adhesive made up of grey and white cements, ideal for small size ceramic tiles, 100% Made in Italy.

Mixed with water, tilefix makes up a glossy and plastic paste with good adhesive properties for all indoor materials and all substrates normally used in construction as long as they are non-deformable and with absorption $\geq 3\%$.

INSTRUCTIONS FOR USE

PREPARATION:

The substrates must be solid, free from oil, grease and dust free.

Mix the Tilefix approximately with 24% of water, until it will be a homogeneous, bright and plastic adhesive.

After have left to rest it for 5 minutes, re-mix for a while. Now the product is ready, it must be used within 3 hours.


TILING:

Apply the adhesive on the tile and exert a good pression on its surface.

It is recommended to lay the tile during the process, in order to avoid damages on the tile due to the pressure.

The recommended distance between the tiles is about 3 mm from each other.

The optimal temperature of application is 23° C and 50% of humidity, these conditions ensure an open time approximately of 30 minutes. It's recommended to spread the adhesive not all together but a little bit at time, and check frequently that it has not form a surface film before laying the tiles. The floor can be walked after 24 hours with caution.

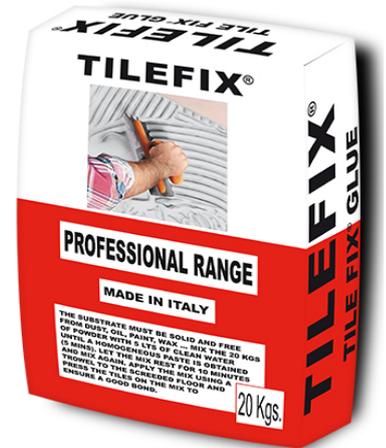

TECHNICAL DATA

BASIS	Cement, aggregates and additives
COLOUR	White and grey
APPARENT MASS VOLUME	1,20 KG/ dm ³
MAXIMUM GRAIN SIZE	0,5 mm



TECHNICAL DATA

SHELF LIFE	12 month in the original closed package in a cool dry place
DANGER OF TOXICITY	No, but the product may cause irritation to the eyes and skin
INFLAMMABLE	No
MIXTURE RATIO	24 %, 6,00 lt water/25 kg bag
MIXTURE CONSISTENCY	Doughy
DENSITY OF PASTE	1,6 kg/dm ³
APPLICATION TEMPERATURE	From + 5°C to + 35°C
OPEN TIME	20 minutes
FOOT TRAFFIC AFTER	24 hours
FULL SERVICE	7 days
FINAL HARDENING	28 days
TEMPERATURE RESISTANCE	-30°C to +90°C

This sheet cannot be reproduced or changed in any of its parts without permission of Global Shipping S.p.a. Unipersonale.



Please note: the data in this sheet are based on our best experience and indicative only.